

Technical Data Sheet

Tudor Model 8120 Keepsake Installation Kit

Kit #91-8220310-Matte,

Kit #91-8220320-Brown

Kit #91-8220322-Caramel

Kit #91-8220359-Blue/Black

Publish Date: 5/5/2005

Kit Components:

QTY	Description	HS Part #
2-	Panel, front and side	2110-296
1-	Panel, front lower	2110-292
2-	Panel, side lower	2110-294
2-	Grill Panel	2110-298
2-	Grill retention frames	5120-052
8-	10-24 x 3/8 Type "F" screws	4500-3426

Tool Required:

Phillips screwdriver



Figure 1 - Tudor with Keepsake Panel Set

Hearthstone Quality Home Heating Products, Inc.
317 Stafford Ave., Morrisville, VT 05661
www.hearthstonestoves.com

Ensure the Tudor is cold before attempting to install the Keepsake panel set.

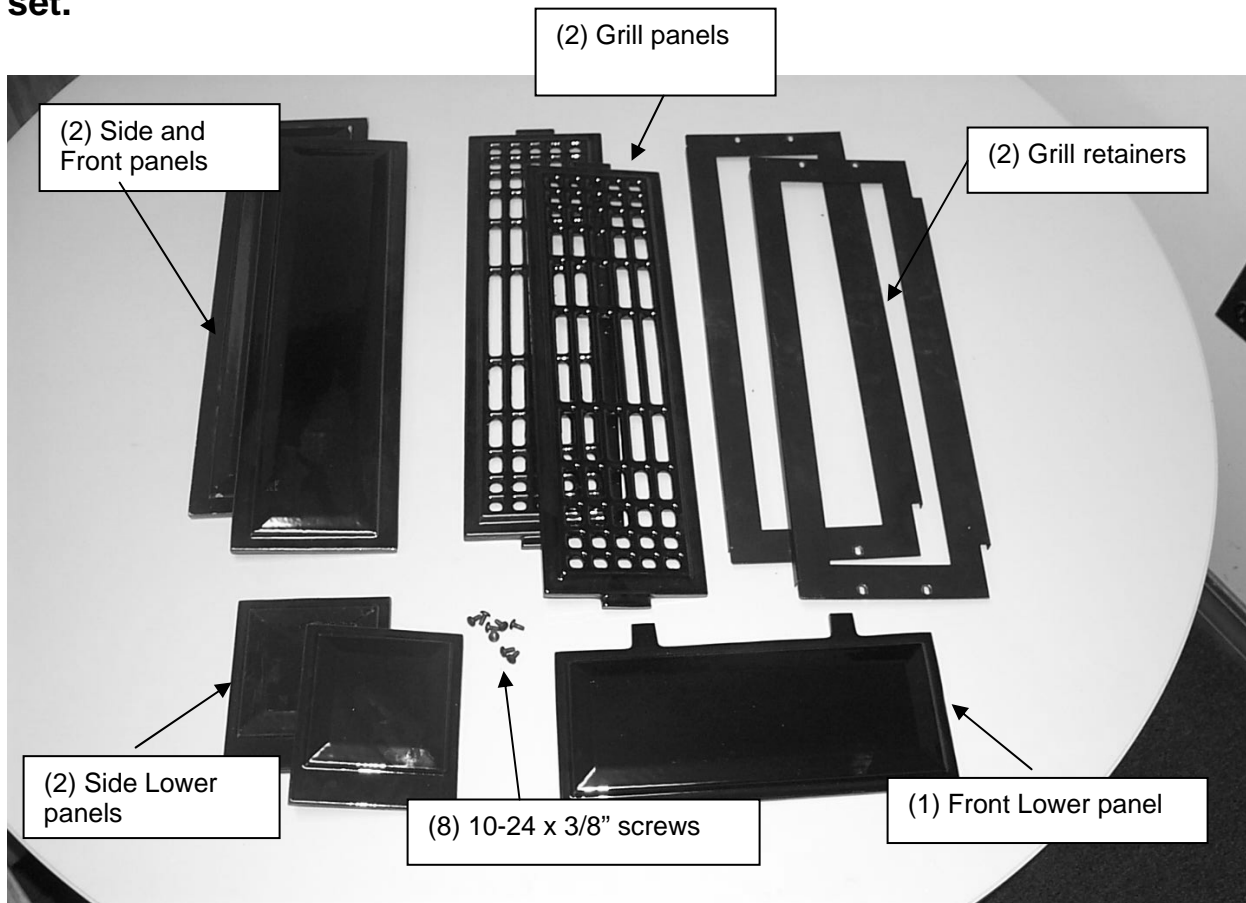


Figure 2 - Keepsake Components

PROCEDURE:

1. Open the front cast doors. (In order to safely install the Keepsake Panel set, you must remove the front doors) To do this, simply pull up on the doors and they will slide up, off their hinges posts.
2. Lay the doors down on a soft scratch resistant surface, such as carpet.
3. Locate and place one of the **Grill Panels** in the left door recess with the finish surface down. Next, place one of the **Grill Retainers** over the left door capturing the grill.
4. Using four of the **10-24 x 3/8" screws**, mount the retainer to the door.
5. Repeat this process for the right side.
6. Once both doors are completed, place them both back on their hinges and close them.

7. Locate the 2 **Lower Side panels**. From behind the unit they will slide in the channel near the bottom. Slight tension is all that is needed to keep these in place. (See figure 3)
8. Locate and remove the four screws holding the rear heat shield on. Set the heat shield aside to be reattached later.

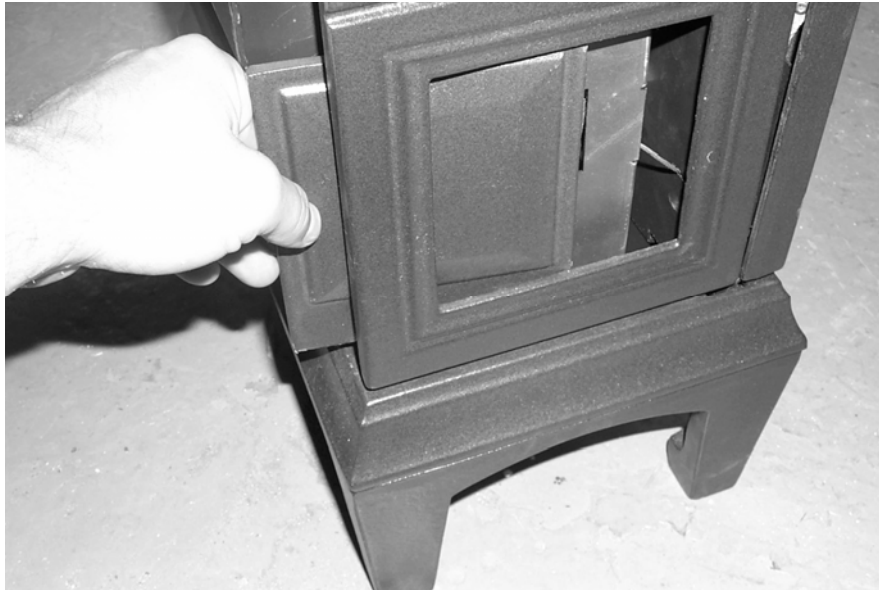


Figure 3 - Small Side Panel Installation

9. Also from behind the unit, slide two of the longer **Side/Front Panels**. These too, only use tension to hold in place. (See figure 4)



Figure 4 – Large Side Panel Installation

10. Open the lower control door. Remove the four screws holding the lower front retainer in place. Pull the retainer away from the door. (Take note of the placement of the cable clips. These are installed to keep the cable in place when opening and closing the door)

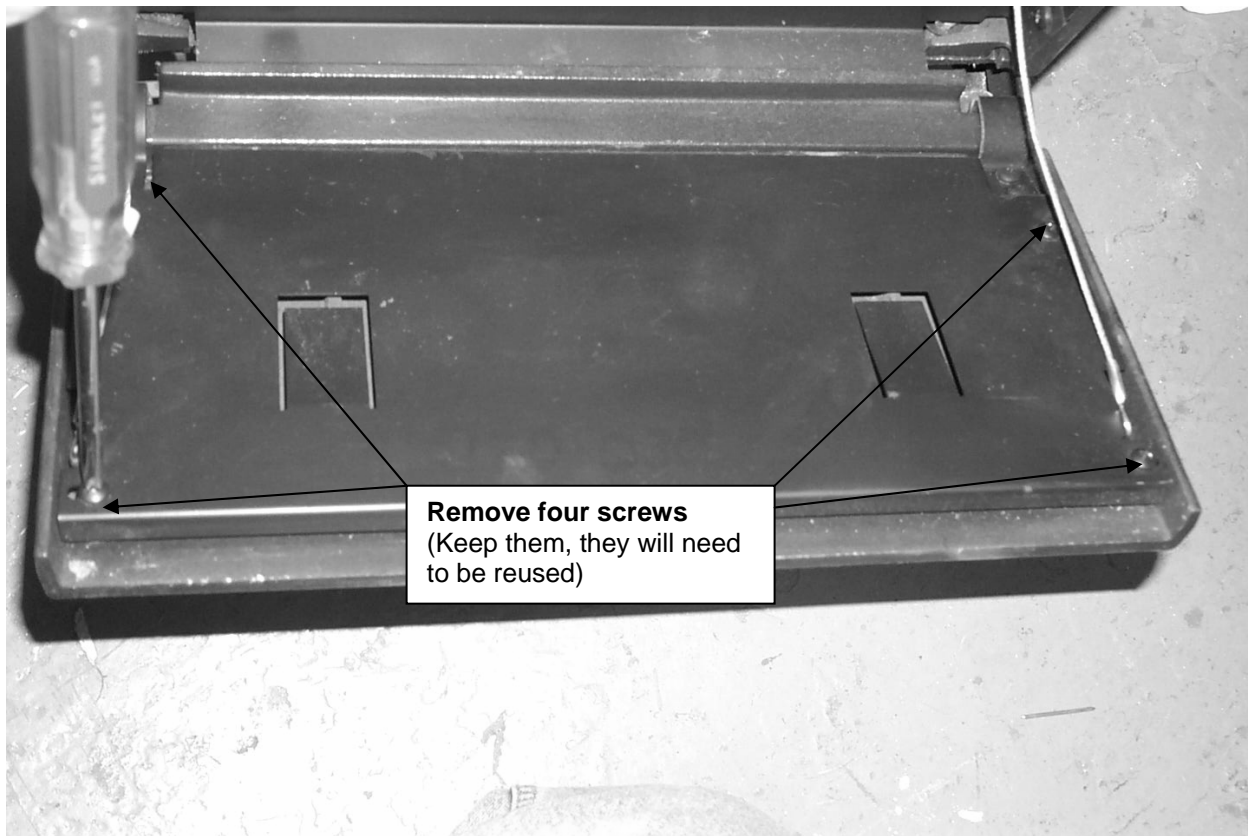


Figure 5 - Front Lower Panel Installation

11. Locate and place the **Lower Front Panel** in the door. (The two tabs on the panel will be at the bottom. They are used to help hold the panel once when installed)
12. Replace the retainer, cable clips, and the four screws. Shut the lower control door.
13. Put tools away, wash up and get ready for dinner.