

Technical Data Sheet

Sterling – Ht Model 8532 Glass Replacement Instructions *Kit #95-58325*

Publish Date: 04/26/2005

MATERIALS REQUIRED:

Glass Kit (Glass, gasket, and Frame)

TOOLS REQUIRED:

Flat-tip Screwdriver
Work Gloves

NOTE: This kit is used for the Sterling Model 8532 Direct-Vent Model only. All earlier Sterling models use glass replacement kit #94-58405.

BEFORE YOU BEGIN:

Ensure the stove is shut off and cool. An authorized HearthStone dealer or qualified gas technician must perform this and any repairs to your Hearthstone gas stove. The gas supply to the stove must be shut off prior to making this repair.

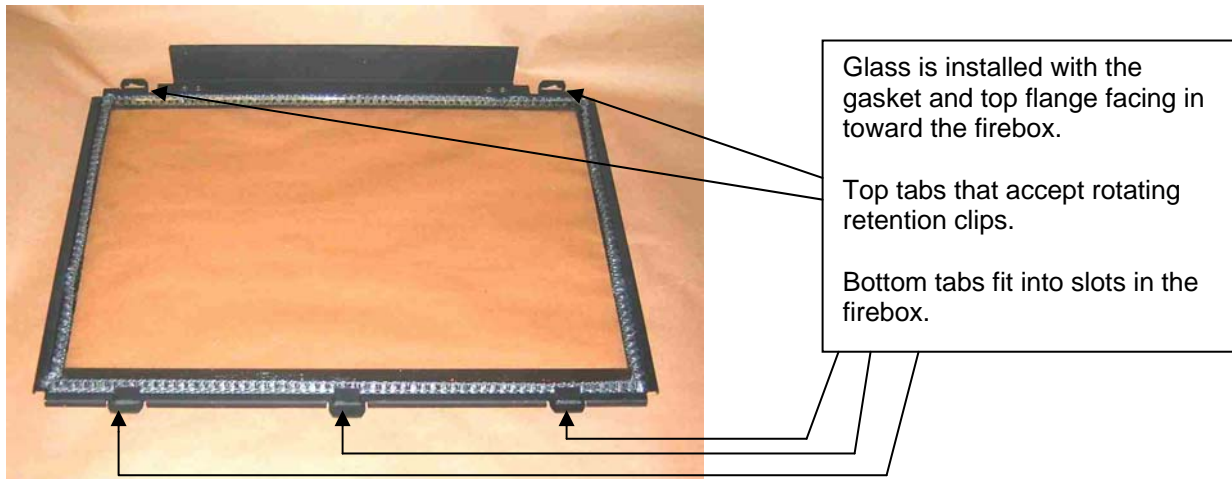


Photo #1 – The Sterling Glass Kit

PROCEDURE:

- 1) Remove the front cast iron façade to gain access to the glass. To remove the front, grasp both sides of the front cast facade, toward the bottom, and lift upward and then outward. The bottom will slide up and out. The whole piece is then easily removed. Set the front aside taking care not to chip or scratch if it is an enamel front.

- 2) Next, locate the two rotating retention clips above the glass. Using the blade of a flat tip screwdriver, rotate the clips out of the “locked” position and tilt the top of the glass outward. Using work gloves carefully lift the entire old glass assembly up and out of the unit and discard.
- 3) Set the new glass assembly onto the stove with the gasketed side toward the firebox. Allow the three bottom tabs to drop into the slots in the firebox and push the top of the glass assembly in until the retaining tabs can be turned into the slots on the top of the glass, once again locking the glass in place.
- 4) Re-install the front cast by sliding the upper portion under the lip of the top and tilting the bottom in flush with the glass assembly. It should then slide downward and be snug in place. Be careful not to chip the enamel when installing the glass assembly or front cast.
- 5) Follow the lighting instructions in the manual to relight the stove.