

Technical Data Sheet

Bristol (8762) Side Glass Kit Assembly

Kit 97-58621

Publish Date: January 27, 2012

KIT COMPONENTS:

97-58621- Side Glass Kit Assembly

TOOLS REQUIRED:

None

 **IMPORTANT:** This kit and these instructions apply to the Bristol (8762) model only.

PROCEDURE:

Be sure the Bristol is cool to touch before replacing the Glass Kit Assembly

1. Remove the Top castings from the unit by lifting and pulling it away from the stove.
2. Remove the Front castings from the unit by lifting and pulling it away from the stove.
3. To dismount the side panels, first remove the top front machine screw while holding the panel, and then lift the side panel off the stove. **See Figure 1.**

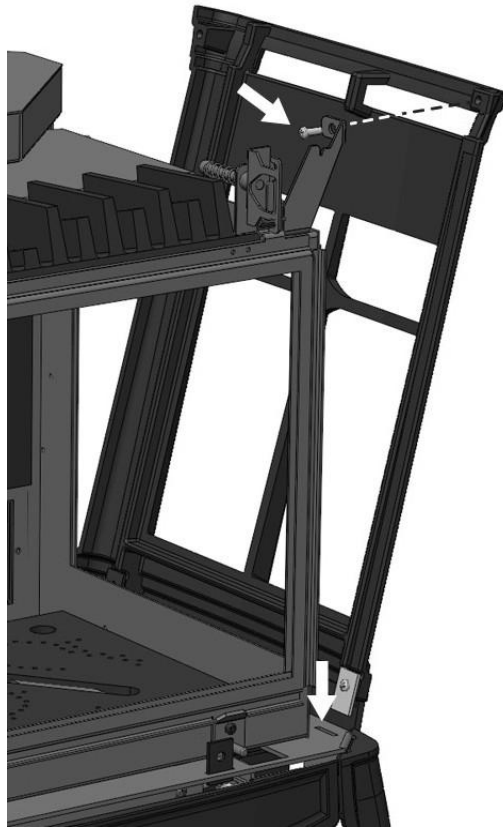


Figure 1

4. Dismount the side glass assemblies by removing the six screws (retain for reassembly) securing the frame to the firebox. Ensure the glass doesn't fall out of the frame during removal.
5. Remove the glass from the side frames by lifting the frame off the glass. You may have to hold the glass down while pulling up on the frame. Do this as evenly as possible to avoid bending the frame, or breaking the glass.
6. Place the new Glass Frame Assembly back in place. Ensure the Glass Frame Assembly is seated against the firebox creating a sufficient seal.
7. Insert and tighten the 6 screws that mount the frame in place.
8. Replace the Side panel, Front and Top castings.